

L **E** series

WOMEN'S SINGLE CYLINDER
LBE24Y7




Lonati

WOMEN'S SINGLE CYLINDER

LBE24Y7



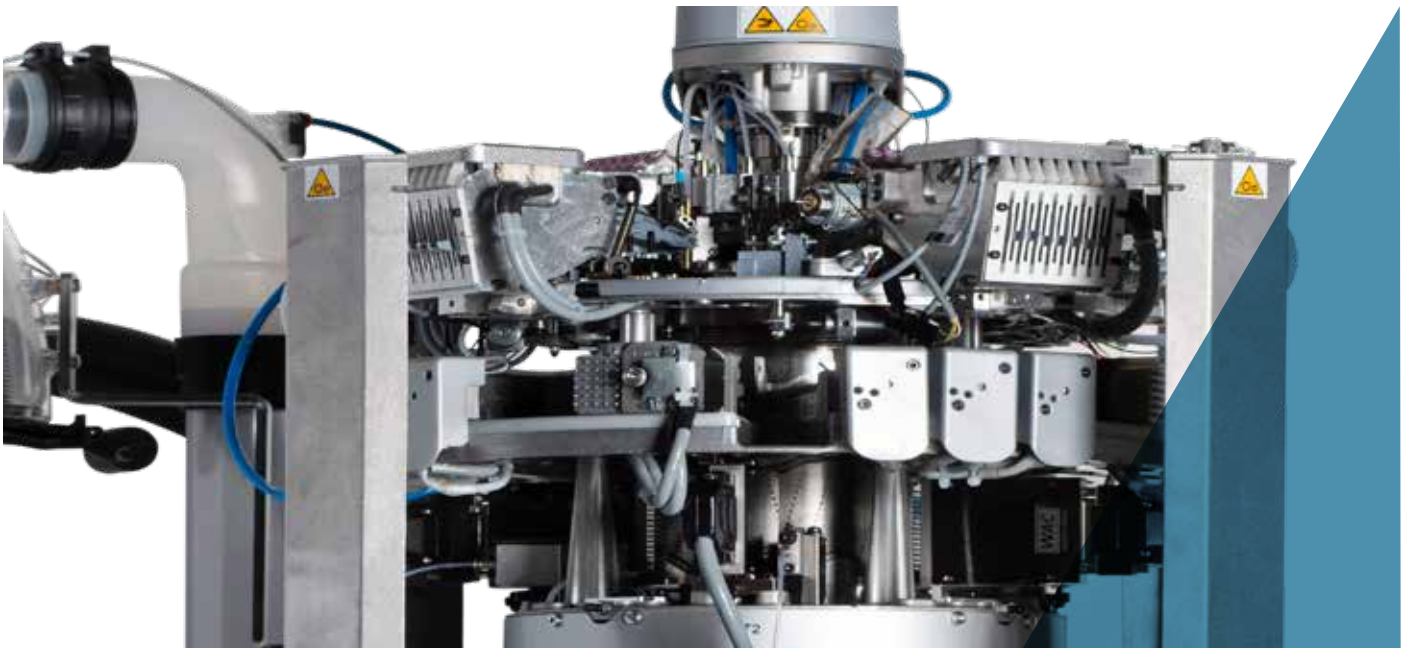

All images in this brochure are indicative and not binding.

WOMEN'S SINGLE CYLINDER LBE24Y7

Electrically controlled single cylinder, 4" $\frac{1}{4}$ diameter, 4 feeds machine, for the production of stockings and pantyhose with 1 electronic needle-by-needle selection unit on each feed (4 in total) for the production of pantyhose in jacquard, baguette and bikini patterns. Mechanical device for laid-in on each feed. Motorized stitch cams for gradual or partial stitch narrowing or widening in any part of the sock. Motorized needle raising cam. Electronic yarnfingers control with plating option at different heights and 1 motorized yarnfinger for angular movement. Single or double dial jacks. Electronic device to maintain the size at any temperature of the machine.

- 4 feeds single cylinder machine
- 1 electronic selection unit on each feed
- 4 stitch units with motorized control of heights
- Motorized sinkers cap, 2 motors
- 24 yarnfingers
- 6 pliers suction unit

MACHINE DIMENSIONS



Length 60 cm + yarn creel 145 cm
Depth 60 cm + yarn creel 145 cm
Height 136 cm + yarn creel 265 cm

MACHINE WEIGHT



Machine 230 kg
Yarn creel 70 kg

CERTIFICATION



Green
Label

WOMEN'S SINGLE CYLINDER

LBE24Y7

TECHNICAL DATA

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
LBE24Y7 (Needle latch 7 mm)	4" ¼	32	0.34 mm

Above data are indicative and not binding.

STANDARD DEVICES

- 26 or 40 reels yarn creel
- Sock ejection hood
- Yarn waste filter
- Stepper motor controlled suction valve
- Rotary or fixed antitwist device
- 4 mobile stitch unit with motorized movement by heights
- 6 pliers suction unit (plates, hooks and cut-pick)
- 4 yarn sliding sensors
- Motorized radial plating on first yarnfinger
- Extra latch-opener for open-work
- Mechanical device for laid-in on each feed

OPTIONAL DEVICES

- DREAM or DREAM ONE device for stretching socks in ejection
1,1 or 2,2 Kw suction fan
- Nautilius software licence
- Dinema GRYF yarn feeder, 12 max
- Dinema Plus medical or bare elastomer yarn feeders, 4 max
- Yarn sensors, 32 max
- Motorized sinkers cap, 2 motors
- Motorized rising dial unit
- Knit-in device kit
- Mock seam device
- UPS - uninterruptible power supply

ALLOWED YARNS

The machine is designed to be used with the following yarns:

- Nylon;
- Filanca;
- Elastomers (bare, single or double cover);
- Stretch, for transparent items;
- Laid-in on each feed

POSSIBLE KNITTINGS

The standard machine can perform the following knittings

- Plain knit
- 1:1, 3:1, 5:1, 7:1, 1:3 fixed mesh, micromech and diagonal mesh
- Different selections for vertical cutting bands
- Several 1:1, 2:2 pattern, bikini pattern, pattern heel
- Supp-hose on 2 or 4 feeds
- Plain knit plating on 2 or 4 feeds
- Supp-hose on 2 or 4 feeds

WOMEN'S SINGLE CYLINDER

LBE24Y7

Lonati

NUMBER OF COLORS

Number of colors

- Working feeds 1-2-3-4: one color each course

PERFORMANCES

	4" ¼ CYLINDER DIAMETER
GAUGE	500 rpm with pattern, stitch cams at 55°
KNITTING FEATURES	550 rpm plain knit, no pattern, stitch cams at 55°
	700 rpm plain knit, no pattern, stitch cams at 48°
	800 rpm plain knit, no pattern, stitch cams at 40°
MAXIMUM SPEED	850 RPM

Above data are indicative and not binding.

DISCLAIMER:

Speed may need to be adjusted according to the inclination of the stitch cams, to the mechanical parts in use and to the yarn.
N.B. All data in the brochure are for information only and subject to change without any prior notice from Lonati SpA.

ALLOWED PERFORMANCES

CHART OF MAXIMUM ALLOWED SPEED IN PLAIN KNIT IN RELATION TO THE INCLINATION TO THE STITCH CAMS	
Stitch cam inclination	Maximum allowed speed in plain knit
40°	800
46°	700
55°	500
58°	450

NUMBER OF POSSIBLE COLORS ON EACH COURSE ACCORDING TO THE NUMBER OF WORKING FEEDS	
Working feeds	Number of colors
1° - 2° - 3° - 4°	1 each course

AVAILABLE CYLINDERS	
GG75-0,34	384 - 400 - 416 - 432 - 448
GG70-0,41	320 - 384
GG54-0,50	288

Above data are indicative and not binding.

DISCLAIMER:

All data related to maximum allowed mechanical speed may require to be reduced (to be adjusted according to functional tests on the machine) when using specific particular yarns and/or knitting features.

Lonati is recommending needles from
GROZ-BECKERT®

WOMEN'S SINGLE CYLINDER

LBE24Y7

NOISE LEVEL


Machine average noise level, suction included LeqA = 74dBA

LUBRICANTS

Average consumption for 500/600 dozens: 1000 gr. - Lonati recommends: Fuchs Renolin Trax 14C - Kluber Tex Sintheso M32 - Esso Eil 0287

GREASE

For seals, bearings etc. Lonati recommends: Damping grease Nyogel 774F

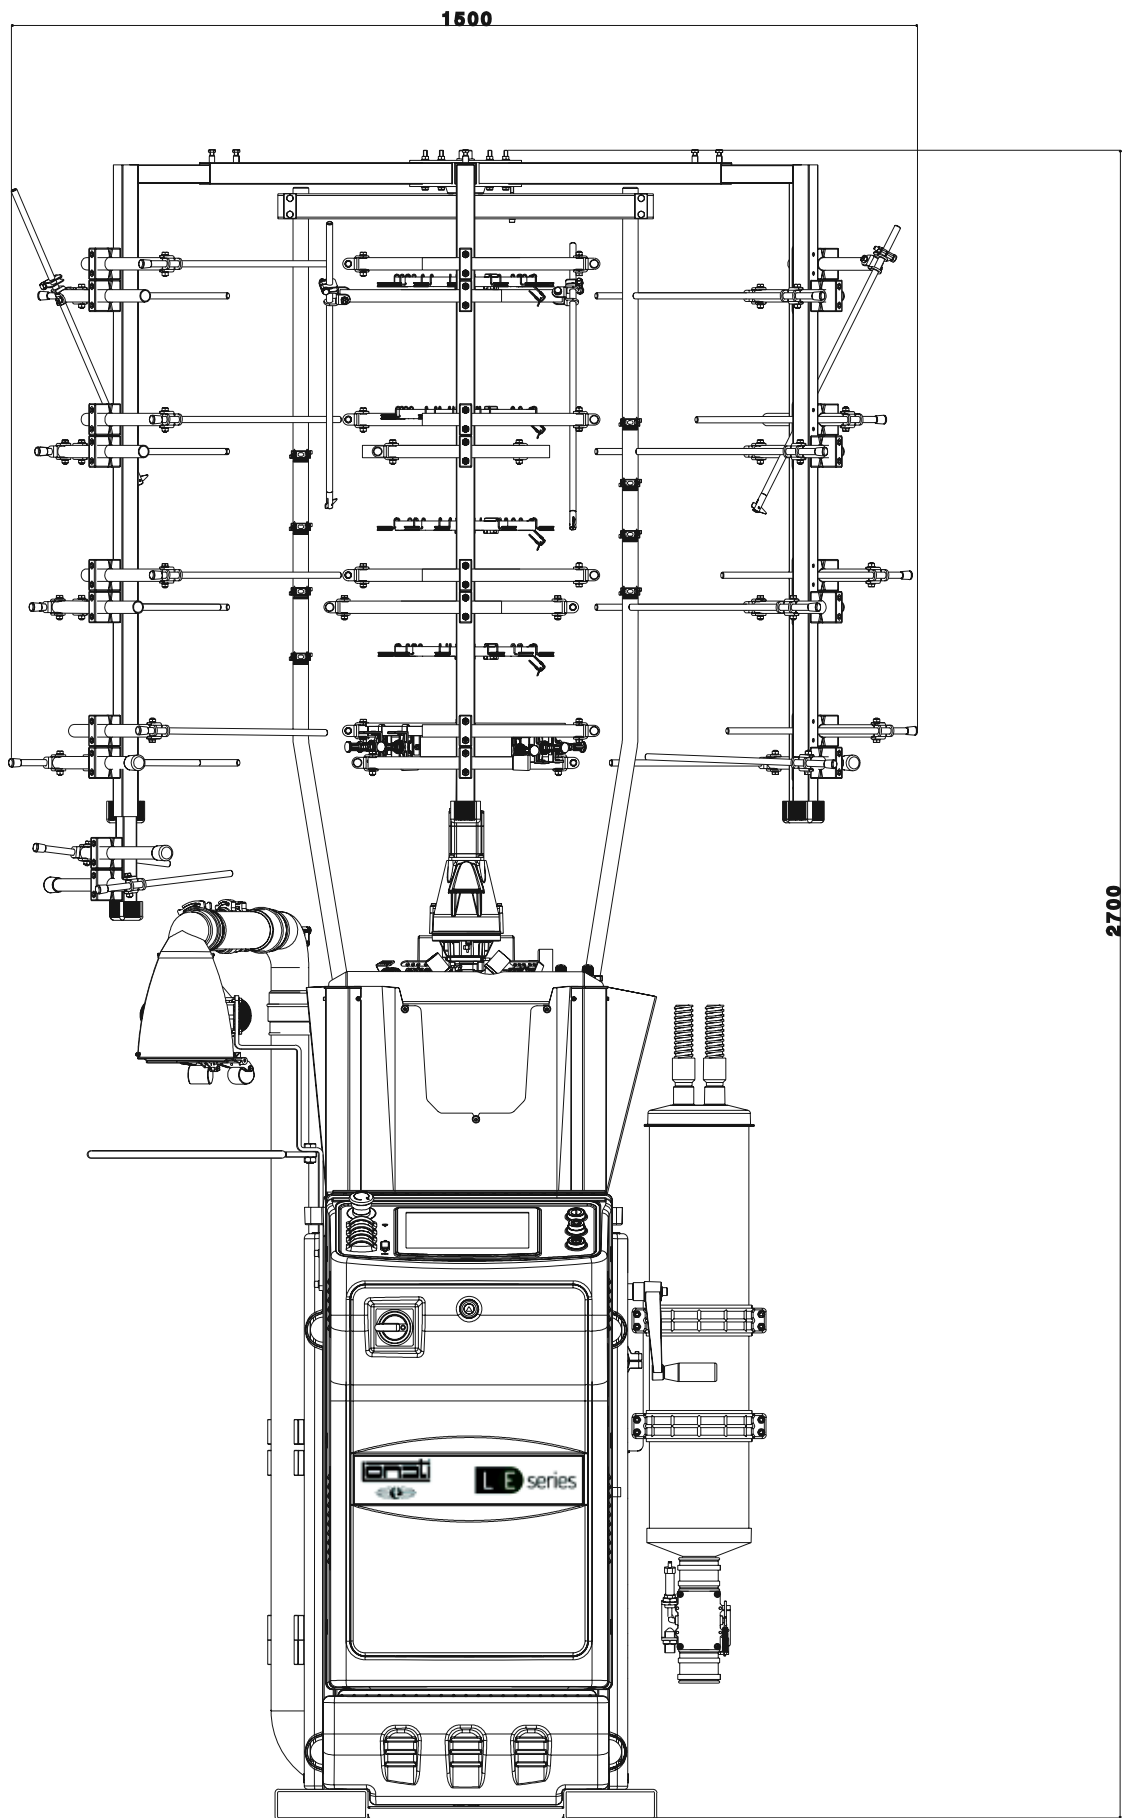


FRONT VIEW

Machine dimensions with 40 reels yarn creel

NOTE:

The picture may show fittings and equipment that are supplied on demand and not.

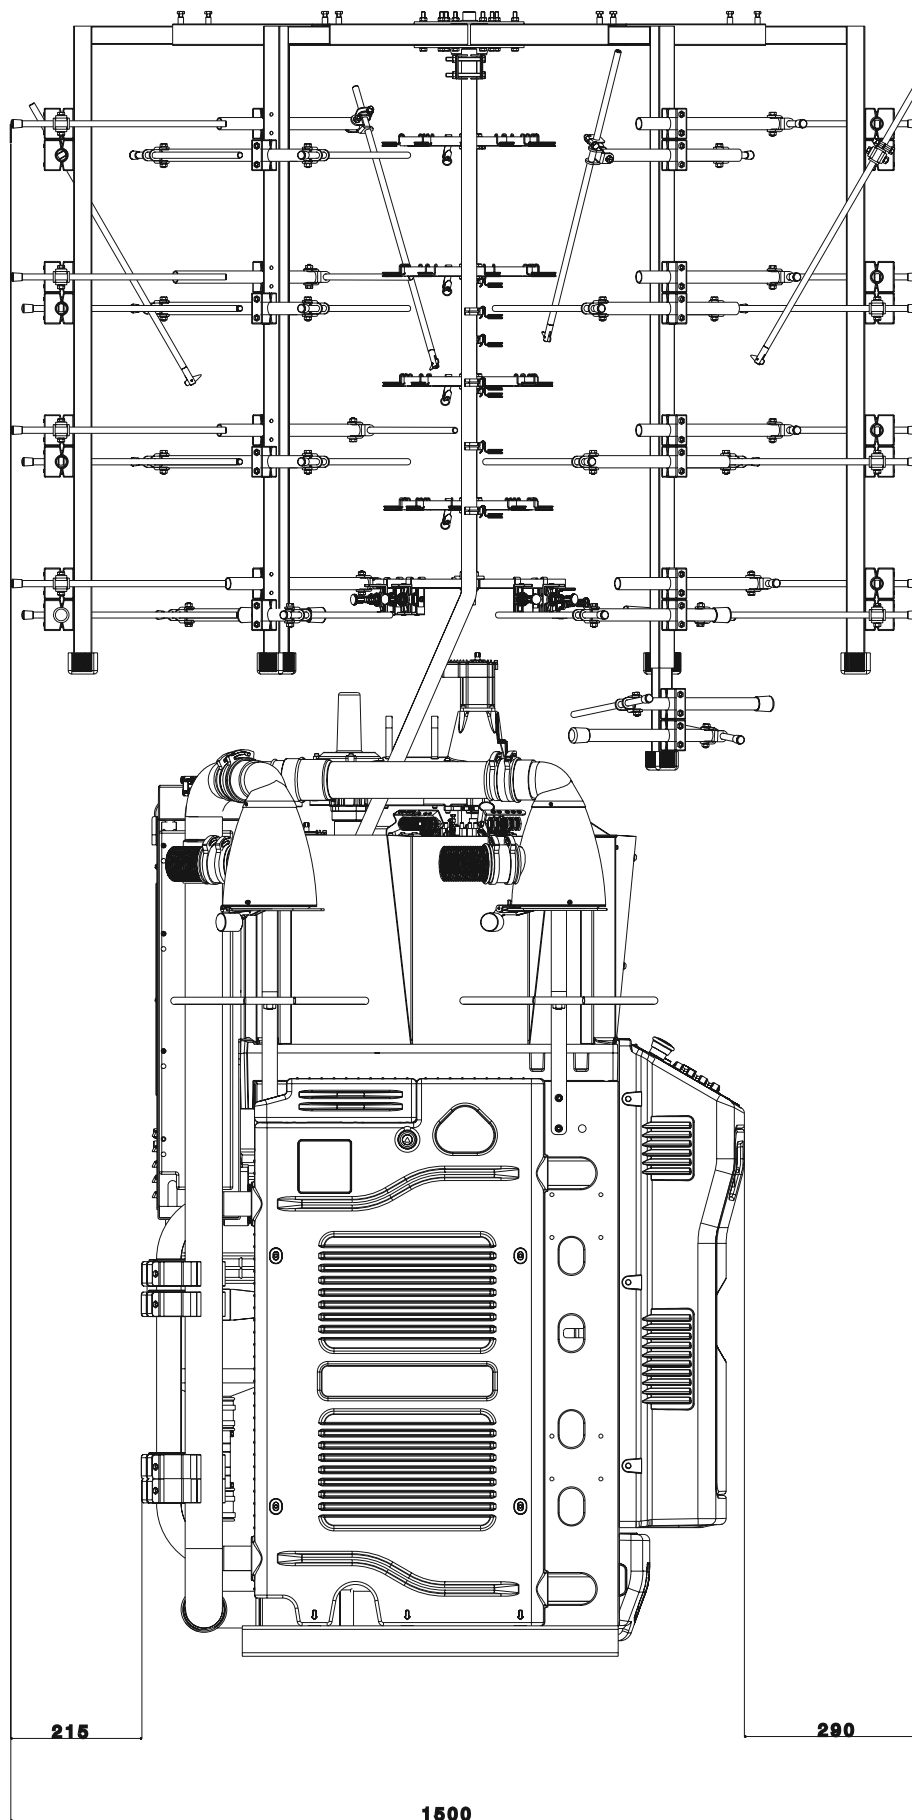

SIDE VIEW

Machine dimensions with 40 reels yarn creel

NOTE:

The picture may show fittings and equipment that are supplied on demand and not.

Lonati

