

G E series

SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0



SINGLE CYLINDER


GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0



KNITTING HEAD
designed to knit high quality items and ensure constant reliability over time

SINKERS CAP
high speed for higher production

NEW ELECTRONICS
9" high resolution touch screen display. New user friendly interface. Ethernet, WiFi, NFC connections. Bluetooth is also available for future developments

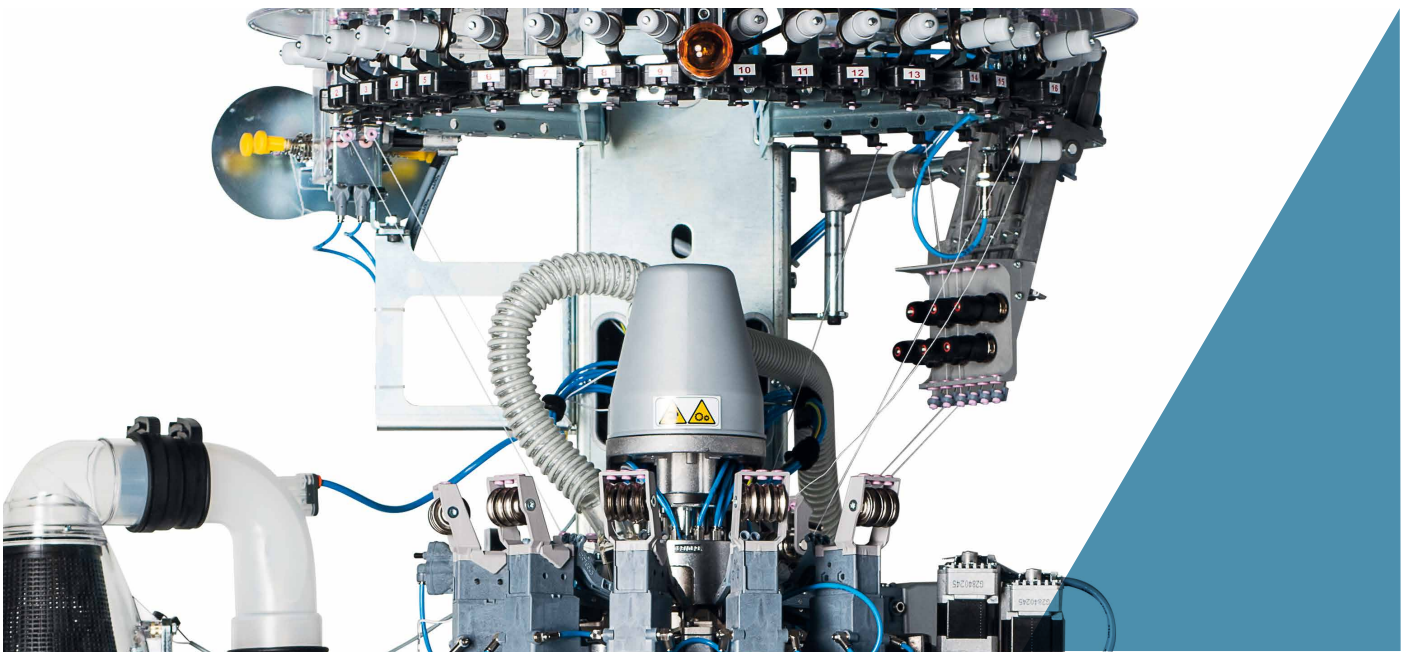

All images in this brochure are indicative and not binding.

SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0

1 feed machines are the best sellers of the single cylinder for men's socks series as, thanks to their versatility, they can produce several different items, from the very simple to the most complex, without compromising on quality and efficiency. Available in two versions, with five or six colors on course and in different diameters and numbers of needles. New electronics provides control and execution of all machine commands. Drawings and articles are created and managed by Digraph 3 Plus software package, which contains a full collection of styles the operator can combine in different ways to obtain the desired results.

- 5 or 6 colors pattern on course according to the model, plain knit
- Reciprocated heel and toe in different sizes and 3D effects
- 20 or 28 yarn fingers, according to the model
- Rising dial and finger plate with stepping motor (on GE516 0 - GE616 0 - GE716 0 only)
- Electronic actuators for needle selection, 8 or 9 according to the model
- Brushless coaxial main motor

MACHINE DIMENSIONS



Lenght max 94.5 cm
Depth max 103.3 cm
Height max 180 cm

MACHINE WEIGHT



ca. 230 Kg

SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0

TECHNICAL DATA

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
GE715 0	3"1/2	6 1/2 to 20	0.85 - 0.70 - 0.60 mm
GE716 0	3"1/2	6 1/2 to 20	0.85 - 0.70 - 0.60 mm
GE615 0	3"3/4	from 7 to 20	0.85 - 0.70 - 0.60 mm
GE616 0	3"3/4	from 7 to 20	0.85 - 0.70 - 0.60 mm
GE516 0	4"	from 6 1/2 to 19	0.85 - 0.70 - 0.60 mm

Above data are indicative and not binding.

STANDARD DEVICES

- Stepper motor electric dial with adjustable height (GE516 0 - GE616 0 - GE716 0 only)
- Stitch cam feed: 1 with 2 different heights.
- 9" high speed sinkers cap
- High resolution touch screen display
- Yarn sliding sensors guard cleaning device
- Heel yarn recover device with four positions
- 9 yarn fingers on stitch feed
- Yarn creel
- USB port
- 10 or 18 color yarnfingers, according to model
- Circular yarn cutter with mechanical stop
- 1 yarnfinger on laid-in elastic feed
- Stepper motor controlled adjustable suction valve

MAIN OPTIONAL DEVICES

- LGL Eco Power or Eco Compact yarn storage feeder, also available with "Attivo" electronic brake version
- Dinema GRYF positive yarn feeders
- Elastic yarn positive feeders, for compression socks
- Dinema Plus elastane positive feeders
- Stitch cams on first feed with 3 different heights
- Motorized stitch cams
- Motorized sinkers cap for sinkers pressure
- Motorized sinkers cap for sinkers pressure and angular position
- Antitwist device
- Footlet device
- Elastane extra tweezers device
- Yarn recover device, 6 positions
- Yarn trimming circular cutter with adjustable speed
- Led inspection lamps
- 3 yarnfingers color group (on GE615 0 - GE715 0 only)
- Preparation for storage feeder "Unifeeder 2" by BTSR
- Ethernet board for connection to Dinema Nautilus data collector system
- Second elastic yarnfinger
- Yarn sliding control sensors, Dinema ISPY
- Pneumatic yarn tensioner for covered elastane
- Suction fan

POSSIBLE KNITTING

The standard machine can perform the following knittings

- 5 or 6 colors pattern, according to model, plus ground color, mesh, tuck and float stitch
- With laid-in elastic: 5 or 6 colors pattern, according to model, plus ground color, tuck and float stitch
- With laid-in elastic: 4 or 5 colors pattern, according to model, plus ground color, mesh, tuck and float stitch

SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0



NUMBER OF COLORS

Number of colors	GE715 0 - GE615 0 5 on course plus ground GE716 0 - GE616 0 - GE516 0 6 on course plus ground
------------------	--

PERFORMANCES

		3" 1/2 3" 3/4 4" CYLINDERS
KNITTING FEATURES		Patterns or selections 300 rpm
		Plain knit without pattern 350 rpm
MAXIMUM SPEED		350 rpm

DISCLAIMER: maximum speed may vary depending on yarn, knitting, lubrication etc

GAUGE

		GAUGE																											
Model	ø	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	12½	13	13½	14	14½	15	15½	16	16½	17	17½	18	18½	19	20	
GE615 0	3"3/4	84	88	96		108	112	116	120	128	132		144		156	160	168		176	180	188	192	200			216	220		240
		Needle thickness 0.85 mm										Needle thickness 0.70 mm										Needle thickness 0.60 mm							
		72		84	88	96	100		108	112	120	128	132		144		156		168			180		192	200				
GE715 0	3"1/2	Needle thickness 0.85 mm										Needle thickness 0.70 mm										Needle thickness 0.60 mm							

		GAUGE																													
Model	ø	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	12½	13	13½	14	14½	15	15½	16	16½	17	17½	18	18½	19	20			
GE516 0	4"	84	88	96		108	112	116	120	128	132	136	144		156	160	168	176	180	188	192	200		216	220			240			
		Needle thickness 1.00 mm										Needle thickness 0.85 mm										Needle thickness 0.70 mm						Needle thickness 0.60 mm			
		72		84	88	96	100		108	112	116	120	128	132		144		156		168			180		192	200				220	
GE616 0	3"3/4	84	88	96		108	112	116	120	128	132		144		156	160	168		176	180	188	192	200			216	220		240		
		Spessore ago 0.85 mm										Needle thickness 0.70 mm										Needle thickness 0.60 mm									
		72		84	88	96	100		108	112	116	120	128	132		144		156		168			180		192	200				220	
GE716 0	3"1/2	Needle thickness 0.85 mm										Needle thickness 0.70 mm										Needle thickness 0.60 mm									

Above data are indicative and not binding.

DISCLAIMER:

All features in the brochure are for information only and subject to change without any prior notice.

For a complete list of available options, please contact Lonati sales network.

The Company accepts no liability for improper use of machinery.

Lonati is recommending needles from
GROZ-BECKERT®

SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0

NOISE LEVEL (Maximum noise output for GE series models)


Noise pressure level on reference surface = LPA 79,5 dB - Noise power level = LWA 96,6 dB - Peak= 109,3 dB

LUBRICANTS


Average consumption for 100 dozens= 270 gr. Lonati recommends: Kluber Madol 183 Supreme - Fuchs Renolin Trax 16C - VICKERLUBE SOCK 46

GREASE

For seals, bearings etc: Lonati recommends: TechnolubeSeals Damping grease Nyogel 774F-1

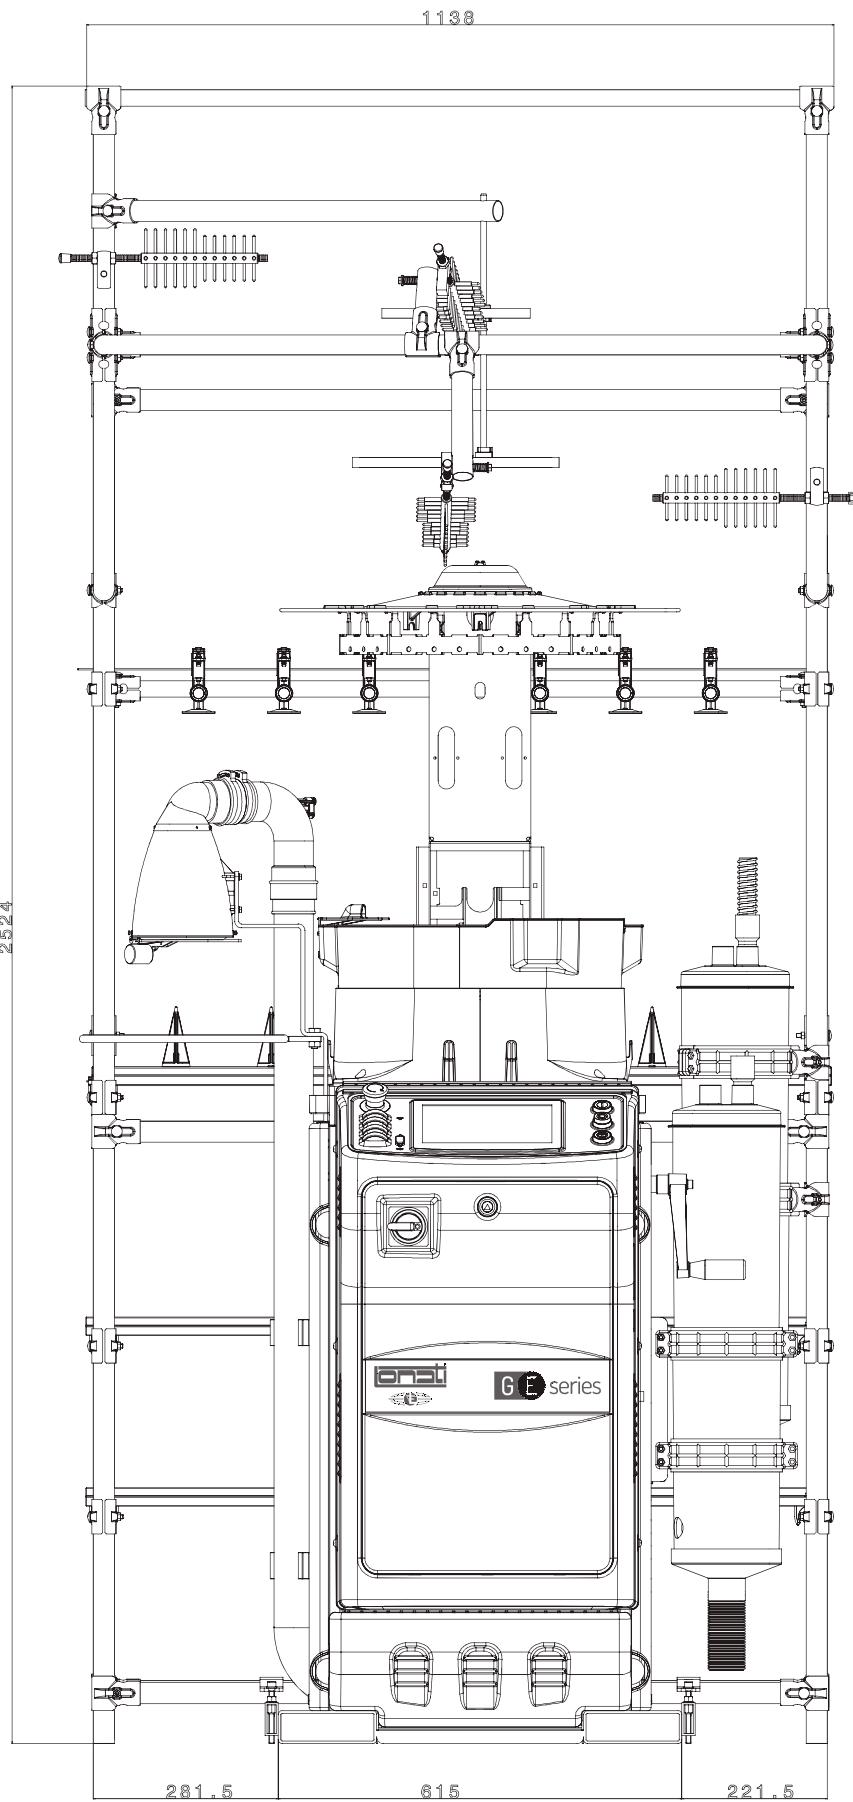

DESCRIZIONE	CODICE	NR. ROCHE	PESO KG.	NOTE
Porta rocche	63930706	23	20	Versione standard
Porta rocche	63930707	23	20	Versione con antistrappo by BTR

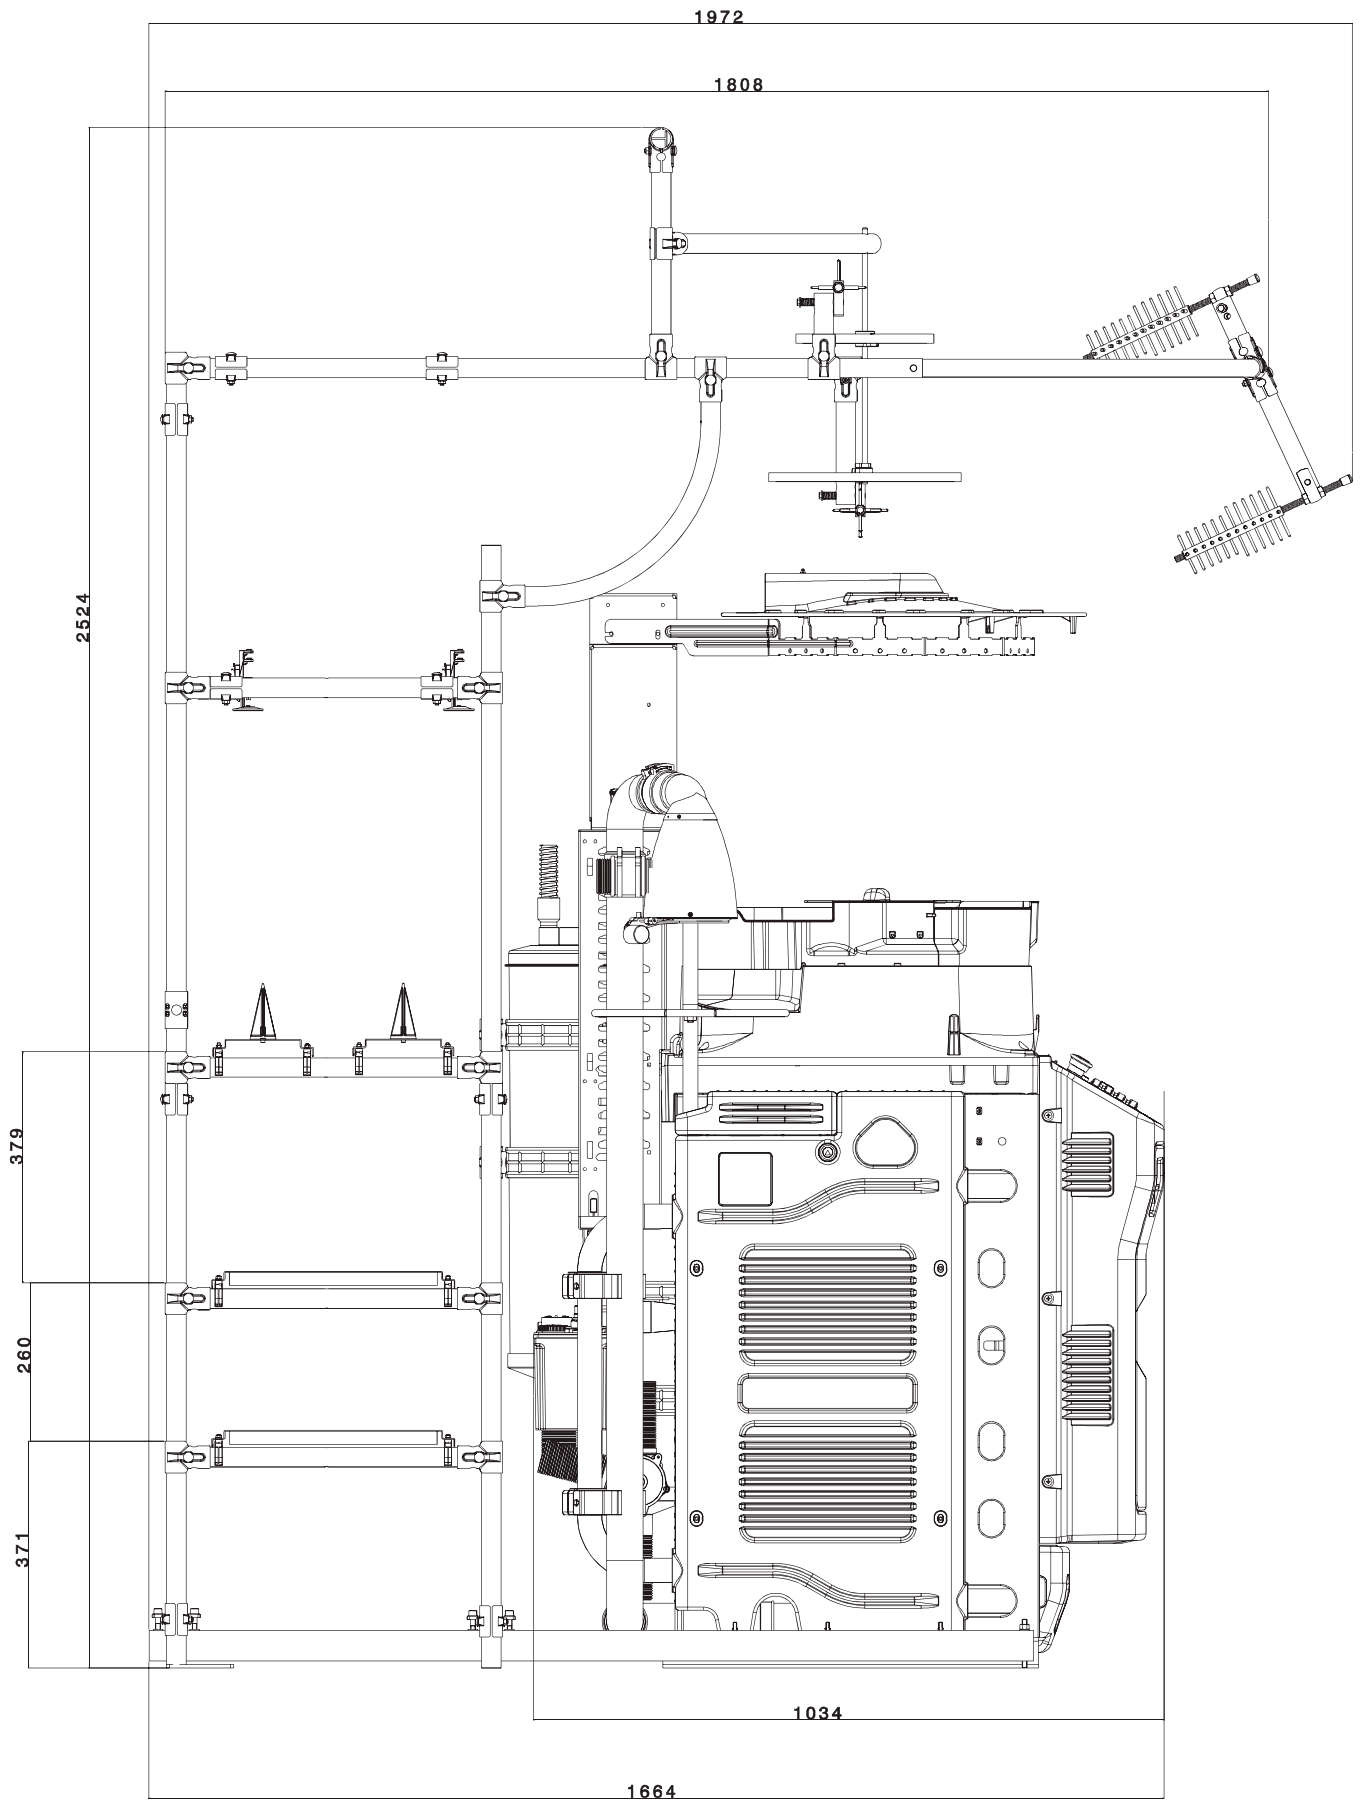

DESCRIZIONE	CODICE	NR. ROCCHIE	PESO KG.	NOTE
Porta rocche	63930706	23	20	Versione standard
Porta rocche	63930707	23	20	Versione con antistrappo by BTR



LONATI SPA

Via Francesco Lonati, 3 | 25124 Brescia (Italy)

Tel. +39 03023901 | Fax +39 030 2310024

C.F.: 01469680175 | P.iva: 02096730961

info@lonati.com - www.lonati.com